

DELTA® protects property. Saves energy. Creates comfort.

DÖRKEN

DRAGOFOL

Maximum Protection via Special Microperforation.

Mesh-reinforced and Tear-resistant.
Permanently Dry Thermal Insulation.



CLASSIC QUALITY

Quality branded products made by Dörken.

■ Reinforced
roofing
underlay

■ For all
back-ventilated
roofs

■ New
construction
refurbishment

DRAGOFOL

Technical Data Overview:

Material	Mesh-reinforced polyethylene film, microperforated.
Application	For all back-ventilated roofs.
Fire resistance	Class E (EN 13501-1) B 1 rating (DIN 4102)
Tensile strength	approx. 400/300 N/5 cm (EN 12311-1)
Watertightness	Watertight W 2 (EN 13859-1+2)
S _d value	approx. 3 m
Service temperature range	-40 °C to +80 °C
Weight	approx. 140 g/m ²
Roll weight	approx. 10.5 kg
Roll size	50 m x 1.5 m

Due to variable weather and UV conditions we recommend the efficient covering of our sheets.

Closed-meshed squares of thread let you lay it easily and securely.

DRAGOFOL ...

- ... is a mesh-reinforced polyethylene film.
- ... offers long-lasting, durable protection from dust, rain and driven snow.
- ... is especially tear-resistant.
- ... allows extra exchange of air moisture via special microperforation.
- ... can be laid quickly and easily straight from the roll.
- ... even weighing only approx. 140 g/m² is very robust.
- ... has close-meshed squares of thread that makes it easy to fix the sheet securely to the rafters. Each tack from your staple gun holds it firmly in place.
- ... is flame retardant.
- ... can be ideally combined with a DELTA®-REFLEX/DELTA®-REFLEX PLUS air and vapour barrier.

Practical Accessories for DRAGOFOL:

DELTA®-MULTI-BAND

All-round adhesive tape featuring top adhesion.


DELTA®-BUTYL-BAND

Weather-resistant butyl rubber adhesive tape.

DELTA®-THAN

Permanently elastic sealing compound for fixing and seam jointing of DELTA® sheet products.

DELTA®

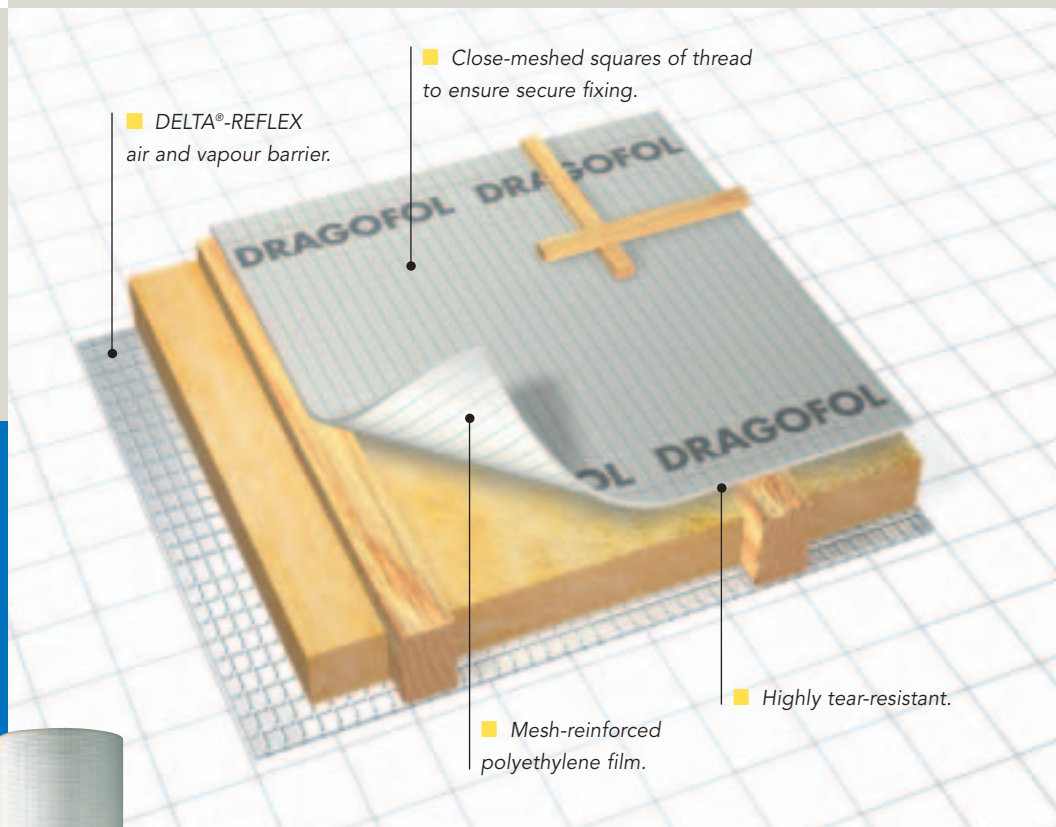

■ DELTA®-REFLEX
air and vapour barrier.

■ Close-meshed squares of thread
to ensure secure fixing.

■ Mesh-reinforced
polyethylene film.

■ Highly tear-resistant.

DÖRKEN

Dörken GmbH & Co. KG
Wetterstraße 58
D-58313 Herdecke
Tel.: +49 23 30/63-0
Fax: +49 23 30/63-355
bvf@doerken.de
www.doerken.de

A company of the Dörken Group.

■ Standard requests for tender and detailed installation instructions for all DELTA® products may be obtained from www.doerken.de as PDF files for you to print out and save.